




WALL PANELS: BETCO 236A

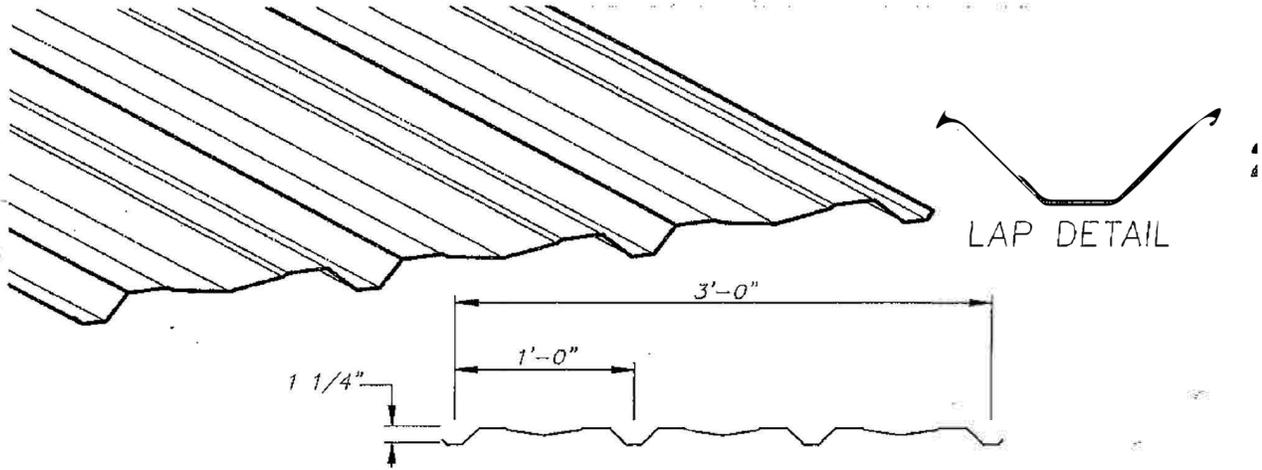

BETCO 236A Wall Panels:

- Available in a variety of colors over 26 gauge Galvalume or Galvanized (pre-painted high durability (HD) finish with a 40 year warranty).
- Optional 29 gauge Galvanized pre-painted (high durability finish with a 40 year warranty) or Bare Galvalume (20 yr. warranty)
- 36" coverage wall panel.
- 1-1/4" deep ribs 12" on center.
- Vertical application eliminates dust collection.
- Pleasing shadow effects.
- Cut-to-length.
- Fewer side laps.
- Nestable for efficient shipping and handling.
- Color-matched fasteners.
- Compatible trim and accessories available.
- Excellent panel for commercial and industrial buildings and for architectural applications such as siding, storefront, mansard, or fascia.

SECTION PROPERTIES							
GA	FY. (KSI)	WT (PSF)	PANEL TOP IN COMPRESSION		PANEL BOTTOM IN COMPRESSION		
			lx in ⁴ /ft	Sx in ³ /ft	lx in ⁴ /ft	Sx in ³ /ft	
26	50	0.874	0.0353	0.0413	0.0357	0.0466	
ALLOWABLE UNIFORM LOAD - WIND PRESSURE - PSF							
GA	SPAN (ft)						
	4	4-1/2	5	5-1/2	6	6-1/2	7
26	61.8	49.1	39.9	33.0	27.8	23.7	20.5

1. All calculations for properties of panels are calculated in accordance with the 1996 AISI Specifications for light gauge structural members.
 2. Values shown as allowable loads are based on panel covering 3 equal spans. Multiply live load values shown by 0.85 for two span condition.
 3. Minimum steel yield strength is 50,000 psi conforming to ASTM A792 SS Gr. 50B.